


16W-3 LAYER MICRO/LEVEL® WEDGE ISOLATOR SPECIFICATION SHEET

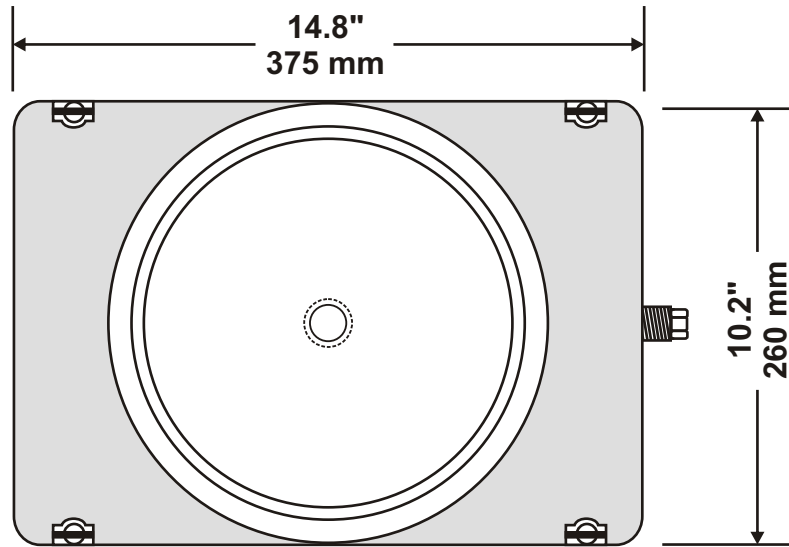

ISOLATOR MODEL	With Friction Pad LOADED HEIGHT		Target Installation Height
	Minimum	Adjustable To:	
16WM403	10.8" (274 mm)	11.8" (299 mm)	11.3" (287 mm)
16WM473	10.8" (274 mm)	11.8" (299 mm)	11.3" (287 mm)
16WL623	9.6" (244 mm)	10.6" (269 mm)	10.1" (257 mm)
16WK723	9.0" (229 mm)	10.0" (254 mm)	9.5" (242 mm)
16WX803	8.1" (206 mm)	9.1" (231 mm)	8.6" (219 mm)


* All Dimensional Tolerances are $\pm 1/8"$ (± 3.2 mm)

ISOLATOR MODEL	With Hold-Down Bolt LOADED HEIGHT		Target Installation Height
	Minimum	Adjustable To:	
16WM403	11.2" (284 mm)	12.2" (309 mm)	11.7" (297 mm)
16WM473	11.2" (284 mm)	12.2" (309 mm)	11.7" (297 mm)
16WL623	10.0" (254 mm)	11.0" (279 mm)	10.5" (267 mm)
16WK723	9.4" (239 mm)	10.4" (264 mm)	9.9" (252 mm)
16WX803	8.5" (216 mm)	9.5" (241 mm)	9.0" (229 mm)


* All Dimensional Tolerances are $\pm 1/8"$ (± 3.2 mm)

Note: Isolator data subject to change without notice.

Elevation Adjustment per turn of Adjustment Screw - 0.022" (0.56 mm)
(Adjustment does not include any changes in elastomer deflection due to changing load)

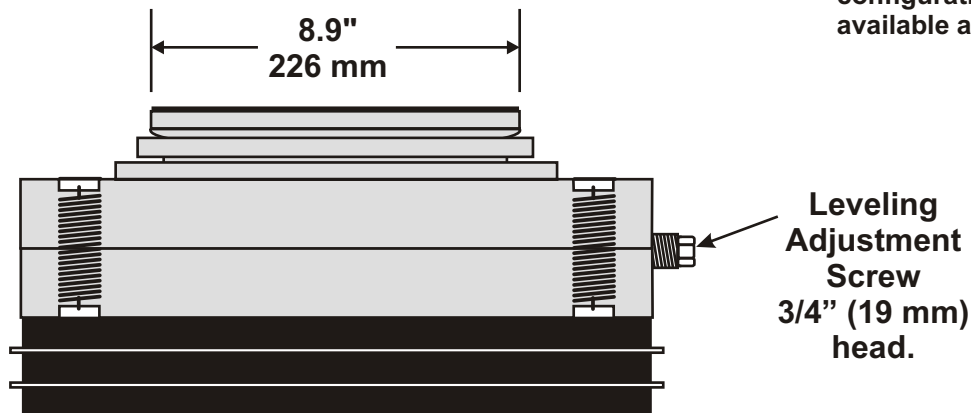

Isolator is furnished with either a friction top pad or an on-center 3/4" or 1.25" hold-down bolt. Off-center hold-down bolt configurations are available as specials.

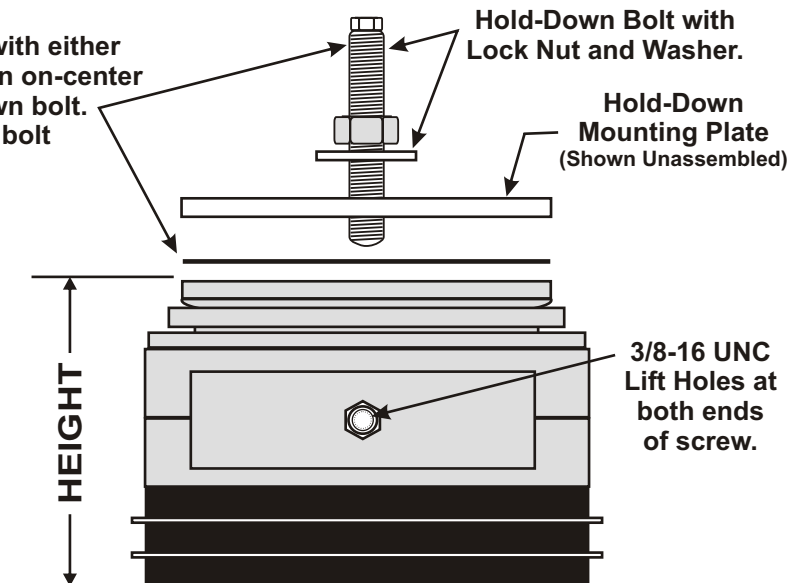

SS-16W-3 2003.12